



SEF - STABILITY FORGIVING

SEF materials, first introduced to archery, enhance shock absorption and reduce vibration, improving bow stability and forgiveness. It fundamentally reduces the impact and vibration transferred to the bow, improving the stability of the bow and increasing forgiveness.

IMPROVED HEAT RESISTANCE

IRR(InfraRed Reflection) pigment coating : Special paint that blocks infrared rays

ACCURACY

An optimal pattern combined various high-performance carbon materials was applied

: Torsional stiffness was increased, resulting in increased accuracy and tighter groups.





USE SPECIAL PAINT TO BLOCK INFRARED RAYS


Special paint reflecting infrared rays on the surface of the limbs was used to block the heat rays from sunlight and reduce the temperature effect on the limbs.

LIMB CURVE TO GIVE STABILITY AND SMOOTHNESS

WIAWIS MXT-XP limbs were developed based on accumulated data that has analyzed the correlation between stability and speed according to the strain distribution of the limbs.

FOAM CORE TO IMPROVE HEAT RESISTANCE


Heat resistance is improved by about 10℃ compared to the previous one to maintain poundage even when the limbs are subjected to increase heat.

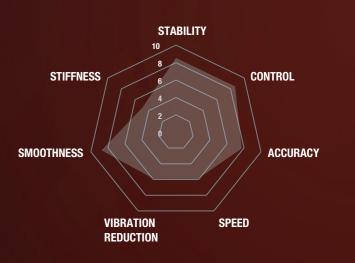

SEF(Soft Epoxy Film) applying


SEF special materials were applied to archery for the first time in the world to dramatically increase shock absorption and enhance vibration reduction performance. It fundamentally reduces the impact and vibration transferred to the bow, improving the stability of the bow and increasing forgiveness.

NS-XP is applied with WIAWIS strain distribution, which improves both strength and stability, by analyzing the correlation between limb bending distribution and speed that WIN&WIN has proven through research.

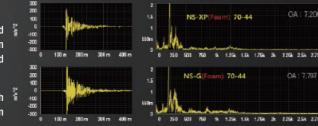

Strain Distribution for accuracy and stability

NS-XP is applied with WIAWIS strain distribution, which improves both strength and stability, by analyzing the correlation between limb bending distribution and speed that WIN&WIN has proven through research.

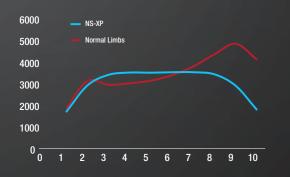


Optimized carbon pattern design


Stability and accuracy after shooting were improved by a combination of varioushigh-performancecarbonswithdifferentcharacteristicswithoptimizedpattern. Special carbon pattern design for NS-XP improves stability of torsional stiffness, durability, changes in pound and speed, bow movement.



IRR: Infrared Reflection coating

A special coating with infrared protection on the surface of the limbs reduces temperature rise by blocking more heat.

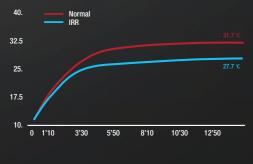

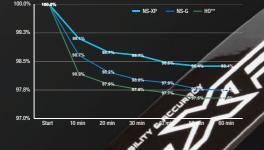





NS-	-XP	WOOD
LENGTH	Short, Mediu	m, Long



LENGTH	Short, Medium, Long	LENGTH	Short, Medium, Long
WEIGHT	28 to 48 lbs (2 lbs increment)	WEIGHT	28 to 48 lbs (2 lbs increment)
MATERIAL	Graphene Foam Core / Advanced High Modulus Carbon	MATERIAL	Wood Core / Advanced High Modulus Carbon





MXT-XP TECHNOLOGY

USE SPECIAL PAINT TO BLOCK INFRARED RAYS


temperature effect on the limbs.



* USE SPEICAL PAINT TO BLOCK INFRARED RAYS: IRR Reduce the high temperature effect

POUND CHANGING IN FULL-DRAWING

Special paint reflecting infrared rays on the surface of the limbs The MXT-XP limbs maximizes archers' shooting skills and improves was used to block the heat rays from sunlight and reduce the arrow grouping by maintaining more consistent power over time at full draw.

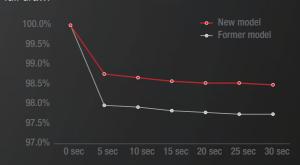

LIMB CURVE TO GIVE STABILITY AND SMOOTHNESS

WIAWIS MXT-XP were developed based on accumulated data that has analyzed the correlation between stability and speed according to the strain dis tribution of the limbs.

They feature 1) the optimized curve to increase the speed and stability with minimizing the stress of the limbs. 2) They were designed to give smoothness in drawing. 3) better concentration and better arrow grouping by improved limbs anti-torsion after shooting. While maximizing accuracy and stability, which are main characteristics of WIAWIS bows. Even for the archer tries to shoot first, MXT-XP were designed to be easy to control and comfortable in short period.





More strain distribution on MXT-XP

F-X CURVE



MXT-XP FOAM

LENGTH Short, Medium, Long	LENGTH	Short, Medium, Long
WEIGHT 28 to 48 lbs (2 lbs increment)	WEIGHT	28 to 48 lbs (2 lbs increment)
MATERIAL Graphene Foam Core / High Modulus Carbon	MATERIAL	Wood Core / High Modulus Carbon

MXT-XP wood

MXT-XP limbs have the most stable design since launching the MXT limb series, which gives the feeling of stable shooting with anti-twisting and smooth drawing. Also, special paint is used to enhance heat resistance on the surface of the limbs to enable consistence performance during changing weather conditions.






GRAPHENE LIMB BASE


The WIAWIS NS-G limb uses a limb base made of graphene prepreg-dispersed in a high molecular epoxy which has been shown to absorb shock and vibration more efficiently, and help stabilize limb movement after shooting. This new concept of limb construction was solely developed and used by WIN&WIN.


STRAIN-BALANCE TECHNOLOGY

WIN&WIN has enhanced the WIAWIS NS-G limbs in both power and stability by applying Strain-Balance technology. The result of years of research, Strain-Balance technology helps WIN&WIN find the optimal limb flex profile through analyzing the relationship between stability and speed according to the limb flex. The NS-G limbs feature enhanced smoothness while drawing without compromising the arrow speed and accuracy which WIN&WIN is known for.

WIAWIS NS-G limbs employ graphene technology to offer shorter and narrower string movement than any other limbs and provide the most efficient energy transfer. This performance creates better arrow grouping with forgiveness.

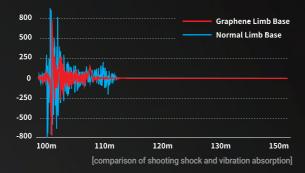

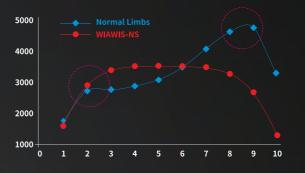

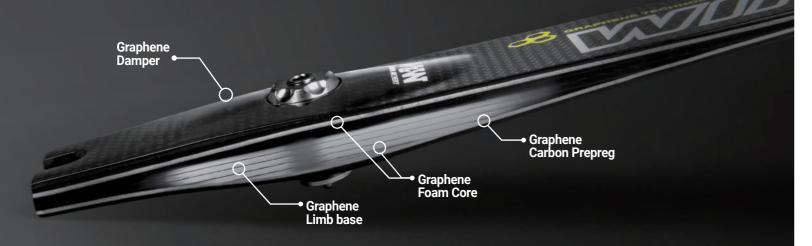

NS-G FOAM

LENGTH	Short, Medium, Long
WEIGHT	28 to 48 lbs (2 lbs increment)
MATERIAL	Graphene Foam Core & Graphene Limb base / High Modulus Carbon

NS-G wood

-	LENGTH	Short, Medium, Long
	WEIGHT	28 to 48 lbs (2 lbs increment)
-	MATERIAL	Wood Core & Graphene Limb base / High Modulus Carbon

The NS-G is very first limb in the world that uses innovative graphene materials for archery equipment. It also adds a function that minimizes the impact that occurs when shooting in the bottom core part of the limbs. It minimizes bow torque that directly affects the arrow light. Softer, but more advanced competition limbs that used graphene on foam cores to ensure that the arrows don't lose speed and light stability.





LENGTH	Short, Medium, Long
WEIGHT	28 to 48 lbs (2 lbs increment)
MATERIAL	Nano Foam Core / High Modulus Carbon
FINISH	Matt

CX7 wood

LENGTH	Short, Medium, Long
WEIGHT	28 to 48 lbs (2 lbs increment)
MATERIAL	Wood Core & Graphene Limb base / High Modulus Carbon
FINISH	Matt

Made of INNO EX POWER's equivalent materials, CX7 is a limb that enables you to feel WIN&WIN's technology more easily with cost effectiveness. CX7 limb is an introductory limb that lets you feel the difference about high-end archery equipment.





WINEX

The WINEX limb has been continuously developed with the WIN&WIN's limb manufacturing process that is improved and refined over time based on WIN&WIN's traditional limb making technology.

LENGTH Short, Medium, Long			
WEIGHT	28 to 48 lbs (2 lbs increment)		
MATERIAL	Royal Cross Carbon		



WIAWIS BOW SPECIFICATIONS

RISER TECHNICAL SPECIFICATIONS

RISER	LENGTH	MASS WEIGHT	TYPE	MATERIAL	
META DX	25 inch	1380 g	RH/LH	Graphene / Nano Carbon	
RADICAL PRO	25 inch	1300 g	RH/LH	Graphene / Nano Carbon	
114	23 inch	1120 g	RH		
INNO CXT	25 inch	1200 g	RH/LH	Nano Carbon	
	27 inch	1260 g	RH		
CX7	25 inch	1250 g	RH/LH	Carbon Composite	
ATF-DX	25 inch	1360 g	RH/LH	Aluminum / CNC Machining	
AII -DA	27 inch	1430 g	NIVLII	Administry one macrifiling	
ATF-X	25 inch	1280 g	RH/LH	Aluminum / CNC Machining	
All A	27 inch	1350 g	100/211	Adminding Cite machining	
WINEX	23 inch	1190 g	RH	Aluminum / CNC Machining	
WINLA	25 inch	1250 g	RH/LH	Aluminum / CNC Machining	

LIMBS TECHNICAL SPECIFICATIONS

LIMBS	LENGTH	TYPE	MATERIAL
NS-XP FOAM CORE	Short, Medium, Long	28~48 lbs	Graphene Foam Core / High Modulus Carbon
NS-XP WOOD CORE	Short, Medium, Long	28~48 lbs	Wood Core / High Modulus Carbon
MXT-XP FOAM CORE	Short, Medium, Long	28~48 lbs	Graphene Foam Core & Graphene Limb base / High Modulus Carbon
MXT-XP WOOD CORE	Short, Medium, Long	28~48 lbs	Wood Core & Graphene Limb base / High Modulus Carbon
NS-G FOAM CORE	Short, Medium, Long	28~48 lbs	Graphene Foam Core / High Modulus Carbon
NS-G WOOD CORE	Short, Medium, Long	28~48 lbs	Wood Core / High Modulus Carbon
CX7 FOAM CORE	Short, Medium, Long	28~48 lbs	Nano Foam Core / High Modulus Carbon
CX7 WOOD CORE	Short, Medium, Long	28~48 lbs	Wood Core / High Modulus Carbon
WINEX	Short, Medium, Long	28~48 lbs	FoamCore / Royal Cross Carbon

GRIP COMPATIBILITY

	1.		4	5	6		7	DX5	DX7	CTK	CTK	CTK -H	8
	Standard Plastic	Standard Wood	Standard Plastic	Standard Plastic	High Plastic	High Wood	Standard Plastic	Standard Palstic	Standard Palstic	CTK II Wood	CTK III Wood	CTK-H Wood	Standard Plastic
META DX	0	0	0	0	0	0		rra 🔳		0	0	0	
RADICAL PRO	0	0	0	0	0	0	•	- H	4856	0	0	0	- 5
TFT-G	0	0	0	0	0	0	•	. 10	1:00	0	0	0	
INNO CXT, CXT LIGHT	0	0	0	0	0	0	•		14	0	0	0	
CX7	0	0	0	0	0	0	•		100	0	0	0	
ATF-DX	9	A) a	-		-			0	0				•
ATF-X	0	0	0	0	0	0	•			0	0	0	
WINEX	0	0	0	0	0	0	•	3.5	100	0	0	0	15.1

※ ● = standard grip to be set in the factory / ○= compatible
※ Wooden grip in same group from 1 to 6 is marked 'high' on the basis of standard grip at the factory.

